




1800 Stephenson Highway
Troy, Michigan 48083

248.680.2323 phone
248.680.2326 fax

<http://www.checkcorp.com>

SEAT HEATER MEASURING GUIDE.

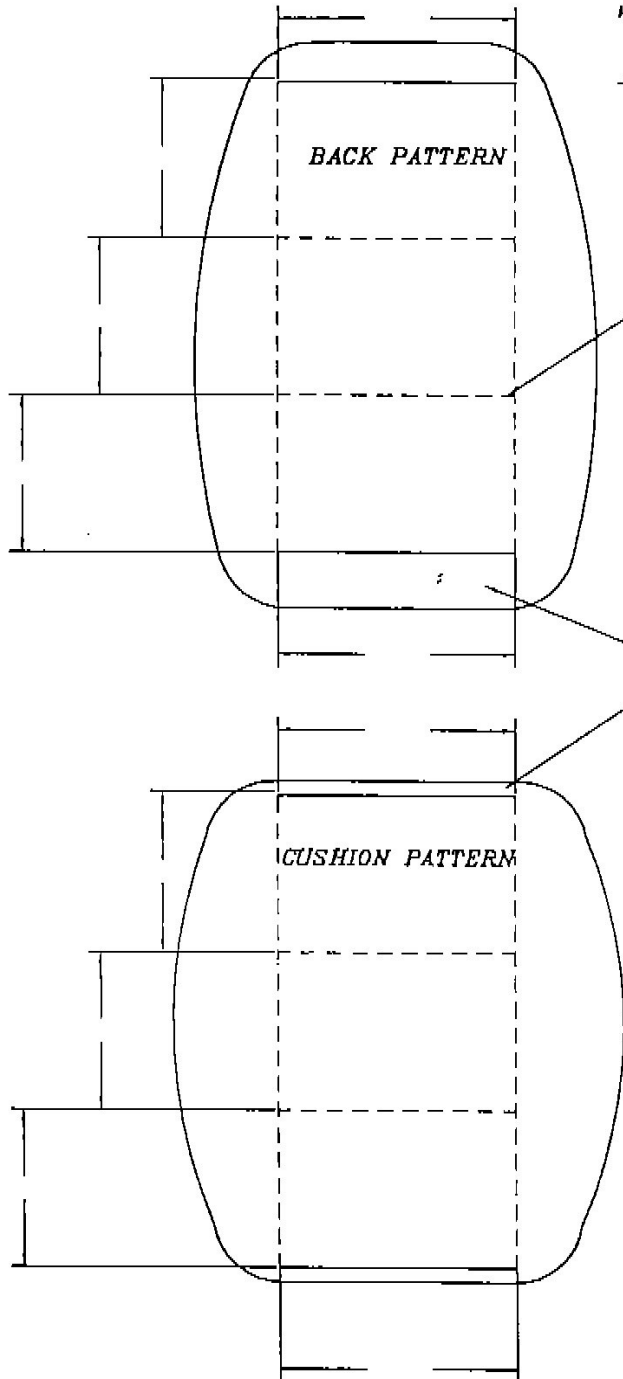

FULL DOWN CHANNELS OR VELCRO

SHOW MEASUREMENTS
FROM THE BITE LINE UP.

BITE LINE AREA WHERE
BACK MEETS CUSHION.

SHOW MEASUREMENTS
STARTING AT THE
BITE LINE FORWARD
ON THE CUSHION.

VEHICLE INFORMATION

Year:

Make:

SEAT TYPE

Leather / Cloth / Bond / Unknown

CONTACT:

Flexible Heating Products For ...

Automotive Seats • Marine Seats • Home Furniture Seating • Medical Furniture • The Food Industry • Motorcycle Seats • RV Seats • Snowmobile Seats



1800 Stephenson Highway
Troy, Michigan 48083

248.680.2323 phone
248.680.2326 fax

<http://www.checkcorp.com>

Model:

PHONE:

How To Measure For Seat Heater Patterns:

BACK REST

Start measuring from the bottom of the backrest – where it meets the cushion – then go upward to the first pull down. Write that measurement in. Then, start a new measurement from that pull down upward to the next pull down or the top of the backrest.

CUSHION

Start measuring from the back of the cushion – where the back rest and cushion meet – then go forward to the first pull down. Write that measurement in. Then, start a new measurement from that pull down forward to the next pull down or the front of the cushion. Write that measurement in.

*To determine if a stitch patten in the seat cover is actually attached to the base foam structure of the seat or just decorative sewn into seat cover only, take needle or pin and run it through one of the middle stitchings in the seam. If the seat cover comes up when you pull on that stitch, it is not a “pull down”. If you can’t pull the stitch up, it is a pull down. The pull down determines the point to which you measure.

**The only time Check Corporation needs the width measured is when the area between the two side bolsters is less than 10” wide.